



HIGH PRESSURE WATER TRANSFER PUMP

COMMERCIAL POWER

1-1/2" SELF-PRIMING PUMP

225 Ft. Max. Head Lift

25 Ft. Vertical Suction Lift

132 GPM Discharge Capacity

5.5 Gross HP* Briggs & Stratton® Commercial-Grade Engine

- ◆ Overhead Valve
- ◆ Cast Iron Sleeve
- ◆ Dual Ball Bearings

High Pressure DAVEY Pump

- ◆ Extremely Durable
- ◆ Easy to Use
- ◆ 4 Convenient Outlets
 - (2) 1" Outlets
 - (2) 1-1/2" Outlets



2-YEAR

COMMERCIAL WARRANTY

*Meets or exceeds SAEJ1940 Gross Power

water transfer • irrigation • boom spraying • agricultural spraying

WP15-225



COMMERCIAL POWER

HIGH PRESSURE WATER TRANSFER PUMP

1-1/2" SELF-PRIMING PUMP

FEATURES

5.5 HP Briggs & Stratton Commercial-Grade Engine

Dual Ball Bearings: Feature higher load carrying capacity and wear resistance for extended life

Cast Iron Sleeve: Withstands wear and abuse while providing improved oil control

OHV Design: Runs cooler and cleaner - Delivering more power, longer engine life and improved fuel economy

MORE DURABLE

Patented Clamped Impellers – A unique clamped impeller design allows for optimum impeller shape and internal surface finish for increased performance. This feature also makes it possible to quickly disassemble the impeller, making cleaning accidental obstructions easier.

Thrust Balanced Impeller – Designed to extend engine life through better handling of pump loads.

Powder Coated Pump Casting – This resilient corrosion-resistant finish helps to extend the life of your Davey pump.

EASY TO USE

Bayonet Style Priming and Drain Plugs - With no tools required, a simple 90° twist releases the plug.

Larger Priming and Drain Ports - Make filling for priming and emptying for flushing quick and easy.


Easy Access Pump Internals - Easy access to suction flap valve and other pump internals increases simplicity of cleaning and servicing the pump.

CONVENIENT OUTLETS

Four-Way Discharge – Allows for easy hose installation and more connection options with two 1 1/2" and two 1" outlets.

WATER PUMP	MODEL 073004
Engine HP	5.5 OHV
Muffler	Lo-Tone
Fuel Capacity	4-Quarts
Inlet Diameter	1 1/2 - inch (NPT Threaded)
Outlet Diameter	1 1/2 - inch (2) & 1-inch (2) (NPT Threaded)
Discharge Capacity (GPM)	132 GPM
Suction Head	25 Feet
Total Head Lift	225 Feet
Dimensions (LxWxH)	19.9 x 17.1 x 15.3 in.
Weight	46 lbs.
Warranty	2-Year Consumer/Commercial

Davey Single Stage Performance
Briggs & Stratton 5.5 Gross HP* Engine

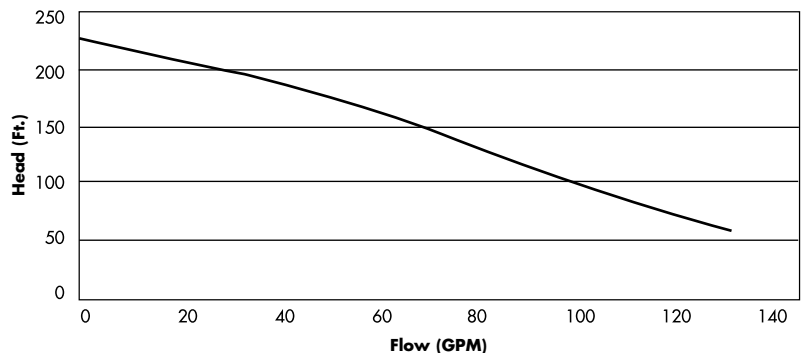

*Meets or exceeds SAEJ1940 Gross Power

Jefferson, WI 53549 USA
1-800-743-4115
www.briggsandstratton.com

© 2006 Briggs & Stratton Power Products Group, LLC.

M0021321