

FRANKLIN MOTOR


STAINLESS STEEL
SHELL AND DRIVE
SHAFT

NORYL
IMPELLERS
AND DIFFUSERS

HEAD	LPH	HEAD	USGPH
42,5m	2275	140'	410
36,5m	8325	120'	800
30,5m	11 350	100'	590
24,5m	14 765	80'	670
18,0m	18 550	60'	740



Friction loss
in pipe
not included

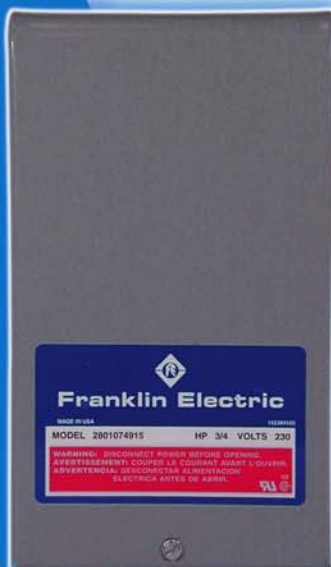

»BURCAM»

»BURCAM»
www.burcam.com

1/2 HP
3 wire / 230 V
DEEP WELL
SUBMERSIBLE
PUMP

105307ST



10
GPM

CAPACITY
UP TO 740
US GPH

ELEVATION
HEAD UP TO
140 FEET

DEEP WELL WITH TANK TYPICAL INSTALLATION



105307ST

