



HS2.4S Trash Pump with RESIDUE KIT


Designed to pump dirty water as low as 0.4"

HS2.4S Trash Pump Features & Benefits

- Urethane Semi Vortex Impeller for maximum durability and pump performance.
- Dual Inside Mechanical Seal with SiC faces provides the longest operational life.
- Oil Lifter provides lubrication of the seal faces. (Patented)
- V-Ring Seal Protector protects mechanical seal from abrasive particles.



- **Pumps down as low as 0.4"**
- **Passes 0.25" solids**
- **Different spacers included to best suit your needs**

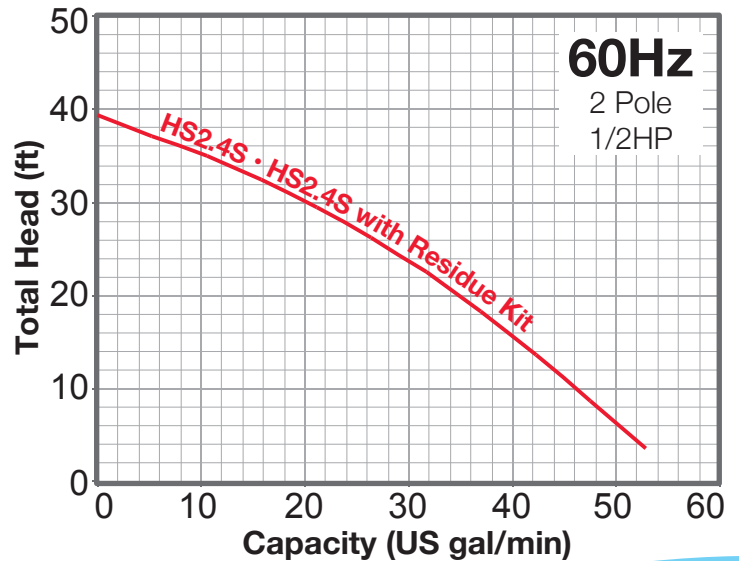

Model	Motor Output (HP)	Phase	Discharge Bore (inches)	Cable Length (ft)	Dimension (inch)		Continuous Running Water Level (inch)	Pump Weight (lbs.)
					Diameter	Height		
HS2.4S	1/2	Single	2	20	10 1/16	12 15/16	3 1/2	25
HS2.4S with Residue Kit	1/2	Single	2	20	10 1/16	11 5/8	1/2	25



For Sales, Service, and Specifications, call:
1-888-TSURUMI (878-7864)

Tsurumi (America), Inc. • 1625 Fullerton Court, Glendale Heights, IL 60139 • info@tsurumiamerica.com