


HIGH PRESSURE PUMPS

Outstanding Features


- Pressures That Can Exceed 3x Over Centrifugal Pumps
- Impellers and Volutes are Constructed of Cast Iron for Durability and Long Operating Life
- Pump Housings are Made of Die Cast Aluminum for Strength, Weight Reduction and Portability
- Self-Priming up to 26 Ft. and a Maximum Head up to 262 Ft.
- Designed for Sprinkler Systems, Fire Fighting, Agricultural, Greater Heights and Longer Distances
- Honda Engines with Low Oil Shut Off (Engine Pumps 2" or Larger)
- Two-Year Limited Warranty on Pump Ends



SEH-40H

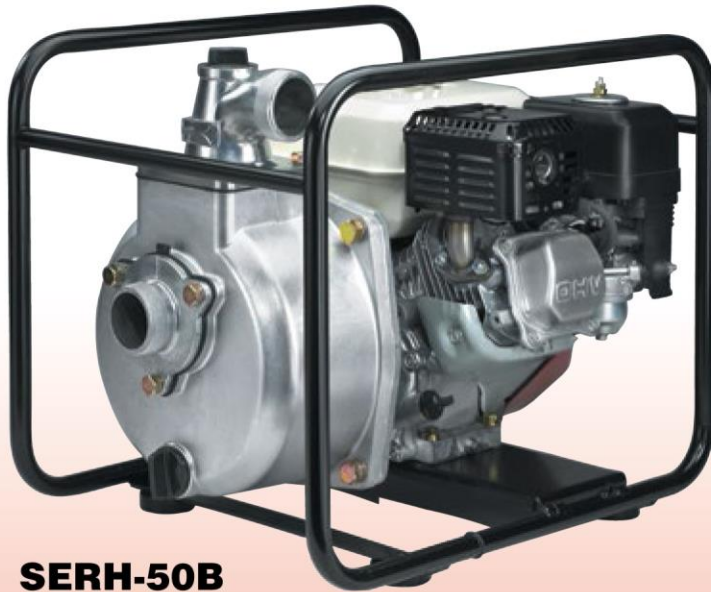

SERH-50B

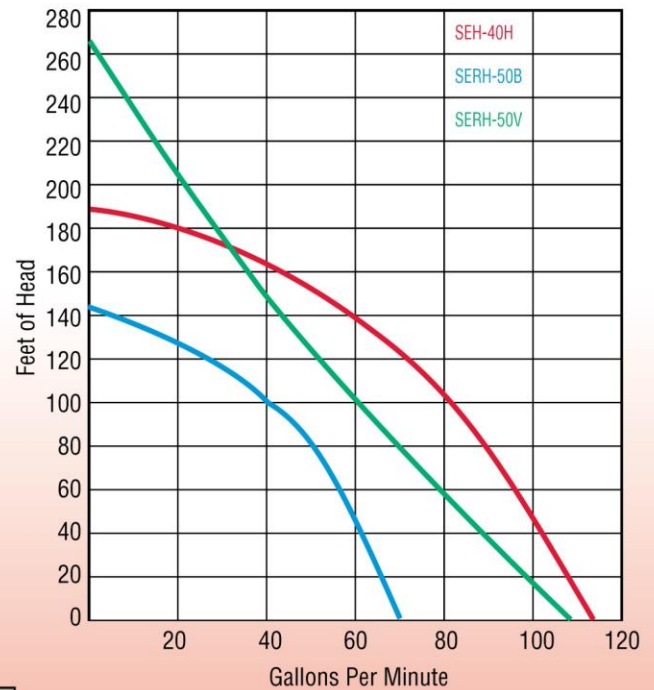

**NEW!
2015**

	SEH-40H	SERH-50B	SERH-50V
Suction Discharge Size	1-1/2" NPT	2" NPT	2" NPT
Maximum Output Capacity	73 GPM	116 GPM	113 GPM
Maximum Discharge Head	141'	187'	262'
Maximum Suction Lift	26'	26'	26'
Maximum Pressure	61 PSI	81 PSI	113.4 PSI
Engine Model	GXH50	GX160	GX160H
Engine Displacement	49.4 cc	163 cc	163 cc
Engine Horsepower	2.1	4.8	5.3
Fuel Tank Capacity	0.20 Gal	0.82 Gal	0.82 Gal
Full Load Run Time	0.83 Hrs	2 Hrs	2 Hrs
Fuel Type	Gasoline	Gasoline	Gasoline
Packaged Weight	26 Lbs	75 Lbs	82 Lbs
Packaged Dimension (LxWxH)	16"x13"x18"	22"x18"x19"	22"x18"x19"



SERH-50V