



TRAILER MOUNTED TRASH PUMPS

6" TRASH PUMP

Outstanding Features

- Cast aluminum casing and adapter
- Cast iron seal plate, volute and manifold
- Stainless steel impeller
- Silicon carbide mechanical seal and Buna O-rings and flapper/check valve
- Handles up to 3" spherical solids
- Easy cleanout and service features with unique slide mechanism permits complete service of pump without removing hoses or removing pump components from trailer (patent pending)
- 12 VDC electric start. Digital tachometer/hourmeter included
- D.O.T. approved trailer. (See your state and local codes for registration)
- Low oil alert, gasoline model
- Maximum temperature 180°F
- Includes tools with open end and hex wrench sets for servicing pump




KTD-150
KTH-150

Specifications

	KTD-150	KTH-150
Suction Discharge Size	6"NPT	6"NPT
Maximum Capacity	1000 GPM	1000 GPM
Maximum Head	98'	98'
Maximum Suction Lift	26'	26'
Maximum Pressure	40 PSI	40 PSI
Engine Type	Yanmar	Honda V-Twin OHV
Displacement	904 cc	670 cc
Horsepower	23 HP	24 HP
Fuel Tank Capacity	20 Gal	12 Gal
Continuous Operation Time Per Tank	12 Hrs	6 Hrs
Fuel	Automobile Diesel	Unleaded Automotive Gasoline
Dimension (LxWxH)	92"x52"x48"	92"x52"x48"
Dry Weight	1125 Lb	800 Lb

Performance

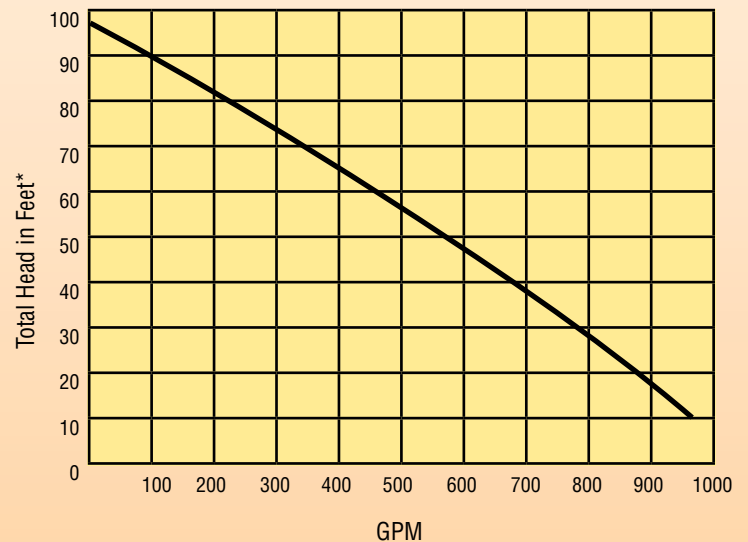

Capacity in US Gallons Per Minute @ 3600 RPM
*Convert to PSI, divide by 2.31

Note: Performance ratings are guaranteed minimum, not inflated maximum.