

PF91025

Thermoplastic Pumps




Product Features

- 1/5 HP submersible utility pump w/ 10' cord
- Submersible utility pump for typical residential & commercial applications
- General water transfer, fountains & ponds, farm use, drain a basement
- 3.6 amps, 352 watts
- Maximum head of 25 feet,
- Maximum flow rate of 26 GPM
- Liquid temperature range 32°-120°F
- Discharge size 1-1/4" MNPT & 3/4" GHT
- Pumps down to 1/4" of the floor
- Handles 1/8" solids

Product Specifications

Performance Curve

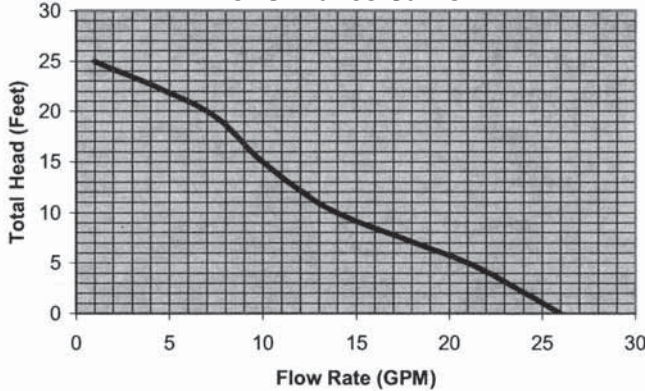

Performance Chart

| Discharge Height | 0' | 5' | 10' | 15' | 20' | 25' |
|--------------------|------|------|-----|-----|-----|-----|
| Gallons per Minute | 26 | 21 | 14 | 10 | 7 | 1 |
| Gallons per Hour | 1560 | 1260 | 840 | 600 | 420 | 60 |

Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. This PROFLO pump carries a 3-year limited warranty. In an effort to continually improve our products, we will make design changes from time to time. We reserve the right to ship newly designed products to fill any order unless we agree in writing to do otherwise.



PF91025

