



HIGH PRESSURE PUMPS

GASOLINE ENGINE HIGH PRESSURE PUMPS

Outstanding Features

- Powerful engines with low oil sensors.
- Light weight construction due to die cast aluminum casing.
- Full roll cage protects pump and engine with vibration isolators.
- Designed for sprinkling systems, fire fighting, agricultural use, and moving water long distances.




SERH-50B



SERM-50V

Performance Curve

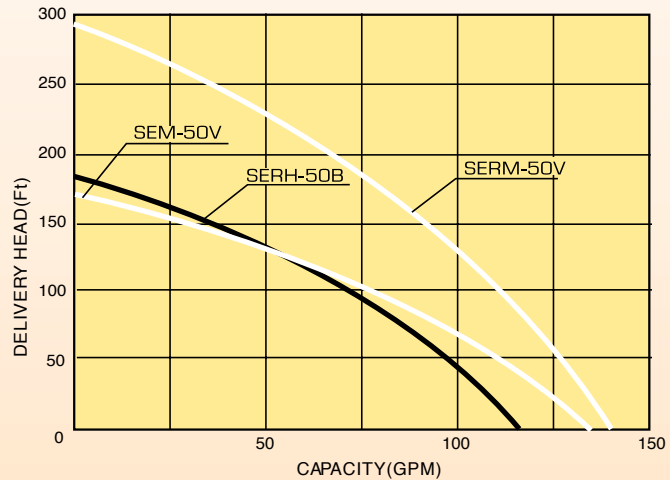

Specifications

	SERH-50B	SEM-50V	SERM-50V
Suction Discharge Size	2"NPT	2"NPT	2"/1"NPT
Maximum Capacity	116 GPM	132 GPM	132 GPM
Maximum Head	187'	164'	295'
Maximum Suction Lift	26'	26'	26'
Maximum Pressure	81.0 PSI	71.0 PSI	127.0 PSI
Engine Type	Honda GX160	Mitsubishi GM132	Mitsubishi GM182
Displacement	163 cc	126 cc	181 cc
Horse Power	4.8 HP	4.0 HP	6.0 HP
Fuel Tank Capacity	0.95 Gal	0.66 Gal	1.0 Gal
Continuous Operation Time Per Tank	2.0 HRS	2.0 HRS	2.0 HRS
Fuel	Unleaded Automotive Gasoline		
Dimension(LxWxH)	20"x15"x17"	20"x15"x17"	20"x17"x18"
Dry Weight	69 lb	55 lb	75 lb

Note: Performance ratings are guaranteed minimum, not inflated maximum.



SEM-50V

WK-12 Wheel Kit

12" Flat Free Tires
Expandable axle mounts to any Koshin pump frame

