


# Pump

## YP30T

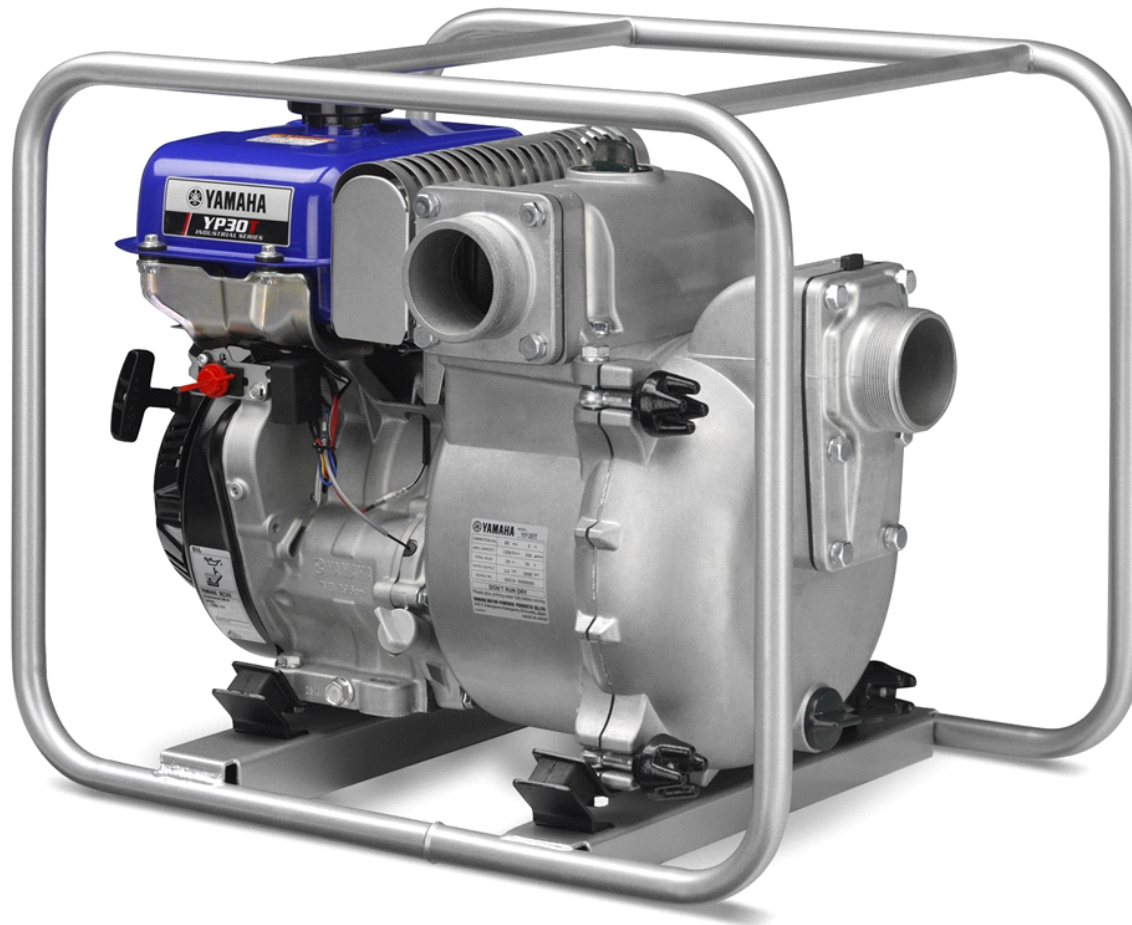

\$1,349 MSRP

### TOP FEATURES:

1. The YP30T uses a 296cc, OHV 4-stroke engine that is quieter, more powerful, and consumes less fuel than comparable engines.
2. Delivers a 79-foot total head, with a 26-foot suction head.
3. Can handle solids up to 1 1/16" (27 mm).
4. Durable Pump - Impeller and volute case are cast iron for greater strength and durability; and they withstand wear from grit, sand, silt, etc.
5. Outstanding Seal Durability - Newly adopted Japanese-made silicone carbide (SIC) seal - has better durability compared to conventional carbon ceramic seals.
6. 3-inch Standard National Pipe Thread (NPT) fittings connect easily with the suction and discharge hoses.
7. 3 year industrial and residential warranty with optional Y.E.S. for customer peace of mind.



Manufacturer's Suggested Retail Price (MSRP) shown. Does not include tax, title, prep or destination charges. Actual prices set by dealer.

## FEATURES & BENEFITS

### FEATURES:

**DeWatering Applications** - Use for these types of DeWatering applications: Job site excavations, Utility vaults, Motocross tracks, Mining sites, Lakes and ponds and Barge holds.

**Powerful Pump** - Pumps up to 356 gal/min (21,360 gal/hr). Use for moving massive amounts of water.

**Cast iron cylinder lining** — Cast iron cylinder lining has optimal heat dissipation.

**Automatic oil warning system shuts off engine before oil level is low** — Prevents engine damage, avoids costly repairs, minimizes down time, enhances long term durability.

**Transistorized ignition provides lean, efficient spark** — Maintenance-free and ensures fast, easy starting, reliable operation.

**Auto-decompression** — Automatically “opens” exhaust valve to reduce compression for easier starting.

**EPA Emission Engine Life Rating** — The YP30T meets the strictest environmental standards - EPA and CARB.

**Tool and Strainer Kit** - Standard equipment.

[yamahamotorsports.com](http://yamahamotorsports.com)

For Accessories, visit [yamahapartsandaccessories.com](http://yamahapartsandaccessories.com)

## SPECIFICATIONS:

<b>Pump Type</b>	Self-priming, Centrifugal
<b>Suction Port</b>	3 in
<b>Discharge Port</b>	3 in
<b>Discharge Capacity</b>	356 gal / min
<b>Self Priming Time</b>	100 sec / 26.25 ft
<b>Total Head Lift</b>	79 ft
<b>Suction Head Lift</b>	26 ft
<b>Solids Handling (Max)</b>	1 1/16 in (27mm)
<b>Engine</b>	MZ 300 4-stroke, OHV, Forced air cooled
<b>Fuel</b>	Unleaded Gasoline
<b>Fuel Capacity</b>	5.5 gal
<b>Starting Method</b>	Recoil Starter
<b>Dry Weight</b>	138 lb
<b>L x W x H</b>	26.97 × 19.88 × 21.85 in
<b>Limited Warranty</b>	3 years

Specifications subject to change without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement. © 2015 Yamaha Motor Corporation, U.S.A. All rights reserved.

\*\*\* Wet weight includes the vehicle with all standard equipment and all fluids, including oil, coolant (as applicable) and a full tank of fuel. It does not include the weight of options or accessories. Wet weight is useful in making real-world comparisons with other models.