

### Sump & Utility Pumps

**MAX LIQUID TEMPERATURE** ... 150°F  
**SHAFT** ..... Stainless Steel  
**CHECK VALVE** ..... Removeable  
**DISCHARGE CONNECTION** ..... Barbed and threaded  
**OPERATION** ..... Fully automatic  
**CORD** ..... 6 ft. power cord with ground  
**OUTLET** ..... 3/8" O.D. outlet

**FEATURES:**

High Impact ABS Tank  
 Wall mounts  
 Three 1-1/8" Dia. intake holes  
 Quiet operation  
 Built-in safety switch (BC-20S only)

\* High water alarm switch internal. BC-20S leads should be connected to a class 2 voltage circuit (not to exceed 30 volts).




**Series: BC-15, BC-20S**  
**BC-15: 1/50 hp, 60Hz.**  
**BC-20S: 1/30 hp, 60Hz.**



**DESCRIPTION:**

GENERAL PURPOSE RESIDENTIAL AND COMMERCIAL PUMP USED FOR CONDENSATE REMOVAL FROM HIGH EFFICIENCY FURNACES, A/C EQUIPMENT, DEHUMIDIFIERS, ICE MACHINES AND OTHER CONDENSATE PRODUCING APPLICATIONS.

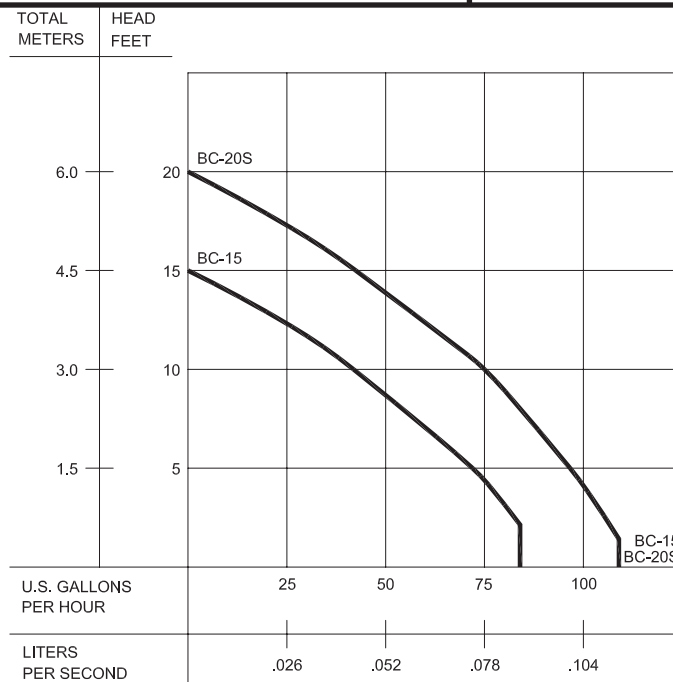


# Series BB15-12

Battery Backup Inverter System

# BARNES®

www.cranepumps.com

## Sump & Utility Pumps

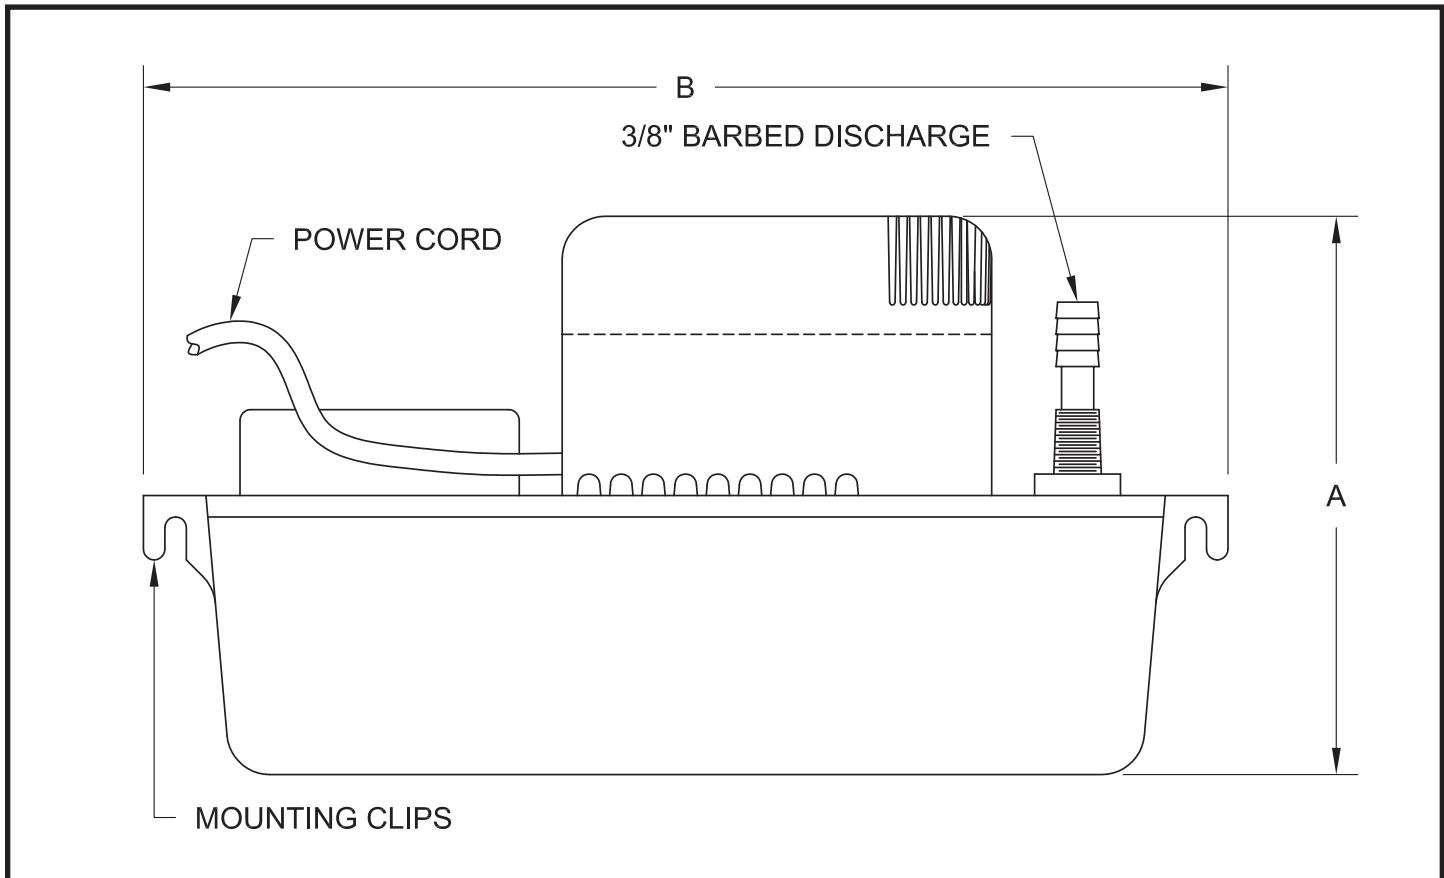

Model	Part No.	HP	Volts/PH	Hz	Full Load Amps	Dimensions in Inches (mm)			Weight (lbs)	Capacity (US quart)	Max. Head (Ft.)	Safety Switch	Cord Length (Ft.)
						Height A	Length B	Depth C					
BC15	135782	1/50	115/1	60	1.0	6.50 (165)	11.13 (283)	5.00 (127)	4.5	2	15	No	6.0
BC20S	135783	1/30	115/1	60	1.5	6.50 (165)	11.13 (283)	5.00 (127)	5.0	2	20	Yes	6.0

SECTION 1A  
PAGE 30  
DATE 10/13

**CRANE**®

A Crane Co. Company

**PUMPS & SYSTEMS**

USA: (937) 778-8947 • Canada: (905) 457-6223 • International: (937) 615-3598