

# HT-PFP-6hpHND-M-TWIN

## HONDA POWERED PUMP

The Goliath model is a compact pump that delivers amazing pressure performance so as to meet the needs of several applications.



## ENGINE SPECIFICATIONS

- GX200 Honda air cooled engine
- Single cylinder, 4-stroke gasoline engine
- Manual recoil start
- 0.8 gallon (3.1 l) integrated fuel tank

## PUMP UNIT SPECIFICATIONS

- C.E.T. dual stage centrifugal pump
- Panel instructions
- Pump body made from aluminum
- Aluminum impeller
- Mechanical shaft seal
- Self priming system
- Two 1" (25 mm) delivery outlets and one 1 1/2" (38 mm) NPSH delivery outlet
- One 1 1/2" (38 mm) NPSH suction inlet
- Dimensions (approx.): Length: 27-1/4" (693 mm); Width: 27" (686 mm); Height: 44-1/4" (1124 mm)
- Weight: 155 lbs (70 kg)


## INCLUDED ACCESSORIES

- Low oil shut off
- 1-1/2" cam-lock x 10' suction hose
- 1-1/2" cam-lock x 100' discharge hose
- 1-1/2" fog/straight stream nozzle
- 1-1/2" strainer with check valve
- Removable bag for accessories

## PERFORMANCE

70 GPM @ 10 PSI  
65 GPM @ 50 PSI

45 GPM @ 100 PSI  
35 GPM @ 125 PSI

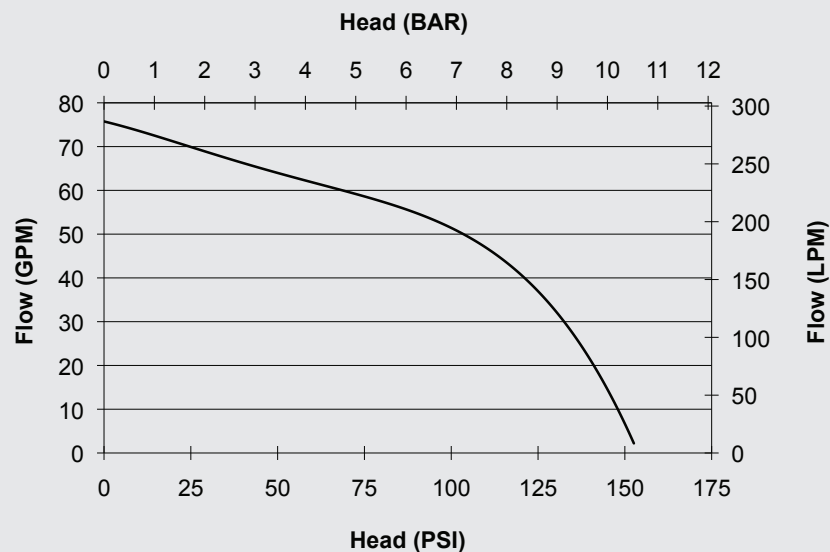

## LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



A CENTURY  
OF ENGINEERING  
FOR THE BRAVEST

75 Hector St., P.O. Box 90,  
Pierreville (Québec)  
Canada J0G 1J0  
Phone : 1-800-567-2719  
Fax : 1-800-434-2613  
[www.fire-pumps.com](http://www.fire-pumps.com)