

# Complete Jet & Tank System

**With Thermoplastic Pump**

**Ideal for Compact Installations**

Where space is at a premium

**Superior Performance**

At depths to water of 25' or less

**Precharged Pressure Tank with 15-Gallon Equivalent Capacity**

Corrosion-resistant, heavy-gauge steel construction with baked-on finish

**Fiberglass Reinforced Thermoplastic Pump Housing**

For the highest corrosion and sand-abrasion resistance

**Heavy-Duty Dual-Voltage Motor**

Preset at 115V




**1/2 HP 8 GPM**  
FP401215H

PERFORMANCE							MAX PRESSURE SHUTOFF	VOLTAGE	PRESS. SWITCH	
	0'	5'	10'	15'	20'	25'			ON	OFF
Depth to water	0'	5'	10'	15'	20'	25'	77 PSI	115/230	30	50
Gallons per minute	8	7.4	6.4	6.1	5.1	4.0				

All performances shown in gallons per minute at 40 PSI discharge pressure.

WARRANTY	UPC	CARTON DIMENSIONS	PALLET QTY.	WEIGHT
1 YEAR	022315101265	24.063" x 14.563" x 27.938"	5	48.75 LBS.

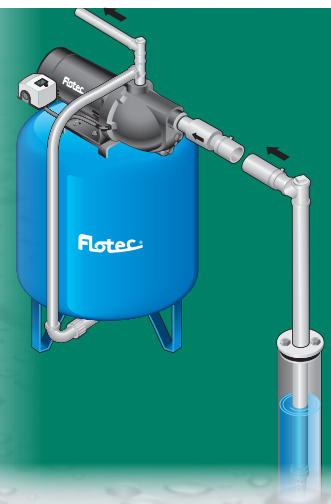

Includes:

Factory-installed 30/50 preset pressure switch, detailed owner's manual