

PROLINE HY-DRIVE WATER PUMPS WITH PROTECTIVE CAGE

PROLINE BY PONDMASTER HY-DRIVE PUMPS are unique, high-capacity pumps designed specifically for use in larger pond installations. The Hy-Drive design combines the benefits of magnetic and direct drive technologies to deliver great performance and high efficiency in an extremely quiet, low maintenance package. The heavy-duty polypropylene enclosure has a built-in carry handle and effective molded-in debris screen. Hy-Drive pumps can be positioned vertically or horizontally and can be used as a submersible pump or as an inline, external pumping source. Available in 1600, 2100, 2600, 3200, 4000, 4800, and 6000 GPH capacities.


OVERALL FEATURES INCLUDE:

- Powerful, Efficient Hybrid Magnetic Induction Motor
- Asynchronous Vortex Impeller
- Whisper Quiet Continuous Duty Operation
- Fish Safe Because No Oil Is Used
- Convenient Carry Handle
- Submersible or Inline Operation
- Threaded Female Couplings and Fittings Included
- Extra-Long Clog Resistant Filter Screen
- Can be positioned vertically or horizontally
- 20' Power Cord with Grounded Plug
- Packed 2 per Master
- 3 Year Limited Warranty
- ETL Listed



1600 HY-DRIVE - ITEM# 02663

Max. Watts/Amps	120/1.0
Inlet	1"
Outlet	1"
Cord Length	20'
Dimensions (L x W x H)	8.25" x 5.0" x 6.0"

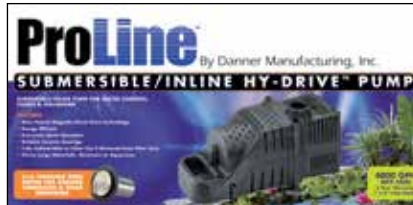

2100 HY-DRIVE - ITEM# 02665

Max. Watts/Amps	190/1.5
Inlet	1"
Outlet	1"
Cord Length	20'
Dimensions (L x W x H)	8.5" x 5.5" x 6.0"

4000 HY-DRIVE - ITEM# 02675

Max. Watts/Amps	200/1.85
Inlet	1½"
Outlet	1½"
Cord Length	20'
Dimensions (L x W x H)	9.5" x 6.0" x 7.0"



ProLine Hy-Drive inside of Pump Bag

2600 HY-DRIVE - ITEM# 02667

Max. Watts/Amps	270/2.2
Inlet	1"
Outlet	1"
Cord Length	20'
Dimensions (L x W x H)	9.0" x 6.25" x 6.75"

4800 HY-DRIVE - ITEM# 02670

Max. Watts/Amps	280/2.15
Inlet	1½"
Outlet	1½"
Cord Length	20'
Dimensions (L x W x H)	9.5" x 6.0" x 7.0"



6000 ProLine Hy-Drive without Pump Housing

3200 HY-DRIVE - ITEM# 02680

Max. Watts/Amps	160/1.5
Inlet	1½"
Outlet	1½"
Cord Length	20'
Dimensions (L x W x H)	9.0" x 6.25" x 6.75"

6000 HY-DRIVE - ITEM# 02683

Max. Watts/Amps	675/5.5
Inlet	2"
Outlet	2"
Cord Length	20'
Dimensions (L x W x H)	9.75" x 6.0" x 7.25"



316 STAINLESS STEEL ROTOR FOR GREATER CORROSION & WEAR RESISTANCE

PM NAME	PM ITEM#	Watts	Flow at 1'	Flow at 3'	Flow at 5'	Flow at 7'	Flow at 10'	Flow at 15'	Flow at 20'	Flow at 25'	Shut-Off (Feet)
PLHD 1600	02663	120	1700	1575	1400	1250	1000	375	-	-	17'
PLHD 2100	02665	190	2075	1900	1750	1600	1300	850	300	-	22' 5"
PLHD 2600	02667	270	2550	2525	2450	2225	1975	1625	1250	300	26' 5"
PLHD 3200	02680	160	3300	2700	2050	1650	650	-	-	-	12'
PLHD 4000	02675	200	4000	3300	2700	2350	1475	-	-	-	13'
PLHD 4800	02670	280	5000	4500	3900	3150	2350	800	-	-	18' 5"
PLHD 6000	02683	675	5500	5100	4700	4200	3650	2450	1150	-	22' 5"