



## SELF-PRIMING 'T' PUMPS

*EXCELLENT FOR PUMPING SOFT SOLIDS, DIRTY WATER, SALT WATER, AND MANY OTHER EFFLUENTS AROUND THE FARM, ON THE WATER OR AT THE JOB SITE.*




### PUMP:

- Pump constructed of corrosion resistant polyester with urethane coated impeller and volute.
- Buna-N elastomers and wearplate.
- Stainless steel fasteners and quick-release band clamp for easy clean out.
- Available in 2" or 3" for maximum flows
- Self-priming with vertical suction lift to 25 ft.
- Rough service oil lubricated silicon carbide shaft seal.
- Includes 2" or 3" zinc coated suction strainer

### ENGINE:

- 2" pump available with B&S 6hp CP Series (Commercial Power) engine with 2 year warranty, 5.5HP Honda GX Series OHV Commercial Series, or 5.5HP Lombardini Diesel
- 3" pump available with either 8HP B&S Intek Pro OHV Series or 8HP Honda GX OHV Commercial Series.

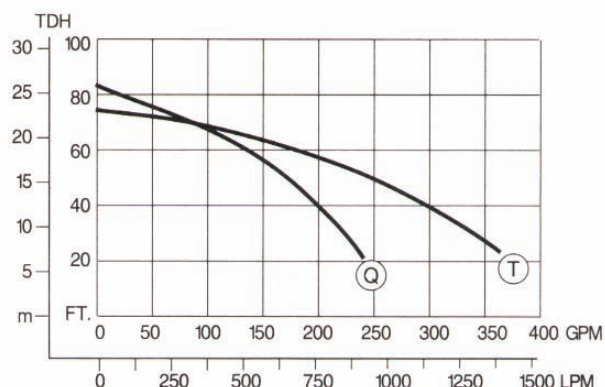

### PUMP SPECIFICATIONS

CURVE	MODEL	ENGINE	PORT SIZE	MAX FLOW	MAX TDH	WT
Q	TE2QBB E6C K	6HP B&S CP	2"	240 GPM	83' (36 psi)	85 lb.
	TE2QBB E5HC K	5.5HP Honda GX				85 lb.
	TE2QBB E5DC K	5.5HP Lombardini Diesel				120 lb.
T	TE3TBB E8AC K	8HP B&S INTEK PRO	3"	360 GPM	78' (33 psi)	116 lb.
	TE3TBB E8HC K	8HP Honda GX				120 lb.

# PACER PUMPS

41 Industrial Circle  
Lancaster, PA USA 17601-5927  
www.pacerpumps.com  
Email: sales@pacerpumps.com

800-233-3861  
717-656-2161  
Fax: 717-656-0477

